

## Guarantee, service, repairs and maintenance

The KL.CRANES products are covered by a guarantee/warranty against material, construction and manufacturing faults. During the guarantee/warranty period, KL.CRANES may replace the product or faulty parts. Work under guarantee/warranty must be carried out by KL.CRANES or by an authorized service centre specified by KL.CRANES

## This is not covered by the guarantee/ warranty:

- Faults resulting from normal wear and tear
- Parts of a consumable nature
- Products that have been subject to unauthorized modifications
- Faults resulting from incorrect installation and use
- Condensation and water damage

## Maintenance:

- Repairs and maintenance must be carried out by qualified personnel
- Use spare parts from KL.CRANES only
- Contact your representative if you require service or other assistance
- Keep the product in a dry, clean place
- Keep contacts and antennas clean
- Wipe off dust using a slightly damp, clean cloth

## Thank you for purchasing

READ ALL INSTRUCTIONS CAREFULLY BEFORE MOUNTING, INSTALLING AND CONFIGURING THE PRODUCT.

This manual includes general information concerning the operation of the radio remote control transmitter.

## General information on Safety

- Persons under the influence of drugs and/or alcohol and/or other medicine that impairs their reaction may not assemble, disassemble, install, put into operation, repair or operate the product.
- All conversions and modifications of an installation/system must conform to the relevant safety requirements. Work on the electrical equipment must be performed only by qualified, authorized personnel and in accordance with the relevant safety requirements.
- In the event of malfunctioning and visible defects or irregularities, the product must be stopped, switched off and the relevant master switches must be switched off.

### Used Symbols and Definitions for Warnings




Warning against hazardous situation



Warning against electrical voltage

# LED HORN

## TA3 Instruction Manual (English)

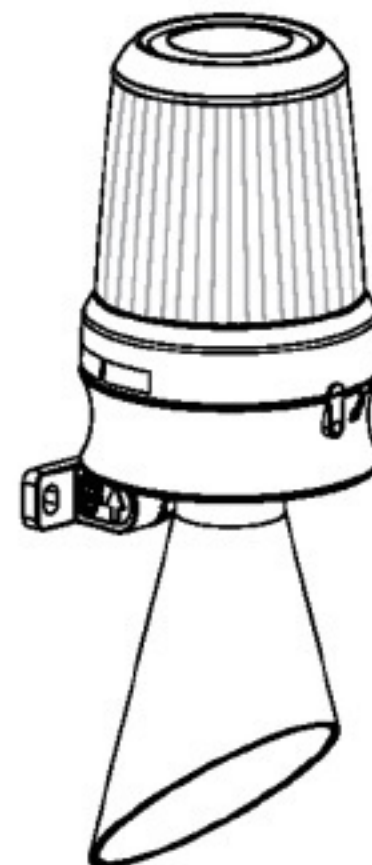

## Technical data

Voltage	24V ~ 264V AC/DC
Standby power	23mA@120Vac
Sound Output	MAX. 90dB
Operating and storage temperature	(-20°C)~(+55°C)/(-40°C)~(+65°C)
Protection degree	IP65
Dimensions	76 x 88 x 225 (mm)
Weight	210g
Housing material	PC-ABS / PC



